

CHINON

INFRAFOCUS

COMPACT 35MM CAMERA WITH BUILT-IN AUTO FOCUS, AUTO LOADING,
AUTO WIND, AUTO REWIND, AND ELECTRONIC FLASH.

FEATURES

- Chinon design automatic infrared focusing system from 2.9 feet to infinity.
- Cancellable auto focus memory lock. Allows focused subject to be positioned anywhere in the viewfinder.
- Automatic film advance and rewind.
- Pop-up electronic flash with a guide number of 46 at ASA 100:Ft..
- Dual LED battery check system.
- Film transport indicator.
- Film end indicator.
- Automatic film loading system.
- Electronic self timer with flashing red LED.
- Full information viewfinder with two LED's for auto focus operation and slow shutter speed warning (1/30th).
- Parallax compensation frame.
- Seiko Electronic shutter with stepless speeds from 1/8 to 1/500 of a second.
- Low voltage shutter release safety system.
- Manual shutter release lock.
- Chinon four element glass 38mm F/2.8 color-corrected lens.

ACCESSORIES

PRODUCT NUMBER	DESCRIPTION
12506	Replacement lens cap
28640	Metal table tripod
40450	Battery Pack



APPROXIMATE SIZE

35mm COMPACT CAMERA

CHINON


INFRAFOCUS

SPECIFICATIONS

- **Type:** 35mm EE Compact camera with infrared automatic focusing system, automatic film loading system, built-in flash and film power winder.
- **Picture Format:** 24×36mm.
- **Lens:** Chinon F/2.8 38 mm lens, 4 glass elements in 3 groups.
- **Viewfinder:** Bright frame, Parallax compensation mark, low light level warning indicator (red LED), Auto-focus operation indicator (green LED) and focus indicator.
- **Shutter:** SEIKO programmed electronic shutter (EV 6-17: ASA 100) with automatic lock system at low voltage, Daylight Sync. possible.
- **Exposure Meter:** Cds automatic exposure system ASA 25-400 (DIN 15-27).
- **Focusing:** Infrared automatic focusing system with range of 0.9M - ∞ (2.9 ft. - ∞) with focus lock (cancellable).
- **Film Wind:** Automatic power winder for single frame advance.
- **Film Rewind:** Automatic power rewinding.
- **Film Counter:** Automatically indicates number of exposures and resets to "S" when the camera back is opened.
- **Film Loading:** Automatically loads film and advance to the start position when the camera back is closed.
- **Self Timer:** Electronically controlled with flashing red LED indicator, for 10 seconds.
- **Flash Unit:** Built-in auto flash unit with "pop-up" design.
- **Guide Number:** 14 (ASA 100: M), 46 (ASA 400: Ft).
- **Recycling Time:** Approximately 7 sec. with alkaline batteries.
- **Effective Flash Distance:** 0.9-5M (ASA 100), 2.9-16.6Ft (ASA 100).
- **Number of Flashes:** Approximately 250 with alkaline batteries.
- **Other Features:** Built-in battery check (red and green LED's), film transport indicator, film end signal (LED), rewind auto-stop and shutter release lock.
- **Power Source:** Two 1.5V "AA" size alkaline batteries (1.5V×2 = 3V).
- **Dimensions:** 137 (L)×77 (H)×54 (W) mm (5.39"×2.99"×2.12")
- **Weight:** 450 grams (15.87 oz.).

STANDARD PACKAGING

PRODUCT NUMBER	DESCRIPTION
39200	CHINON INFRAFOCUS
----	Case
----	Shoulder Strap with Pad
----	Lens Cap
----	Instruction Book

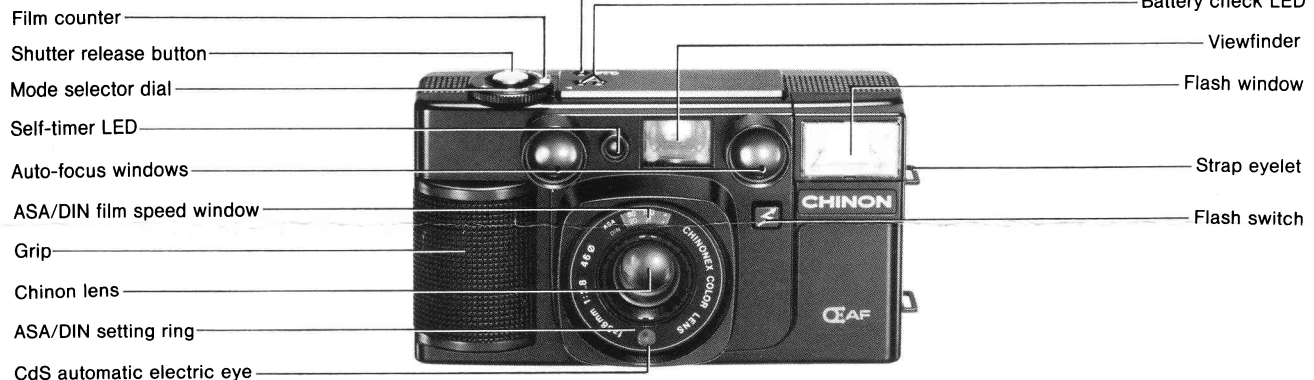

VIEWFINDER

