



OLYMPUS

35RC


● INSTRUCTIONS ●

**You Can't Miss The Moment —
Either Automatic or Manual.**


On automatic you just set the speed, then the camera determines the right aperture setting. The shutter release locks when the light is insufficient. In flash photography, the 35RC automatically determines the aperture opening as you focus. In manual operation, shutter speed and aperture setting combinations are at your discretion.

On either automatic or manual, the easy-to-view double image coupled rangefinder gives you sharp, crisp, pictures. And you can read your shutter and aperture settings in the viewfinder. Olympus engineering designed in a handy self-timer.

Black and white or color, your full-frame 35mm Olympus 35RC will let you enjoy perfect photography with every click of the shutter.

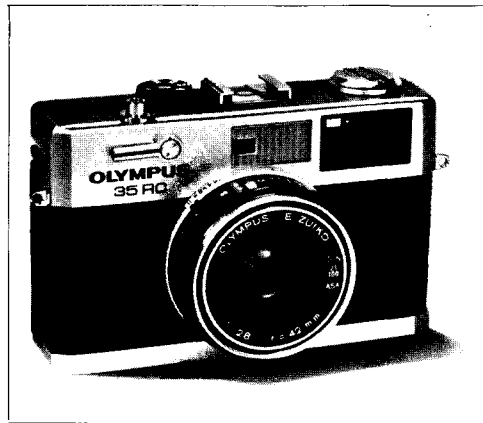

● NAME OF PARTS

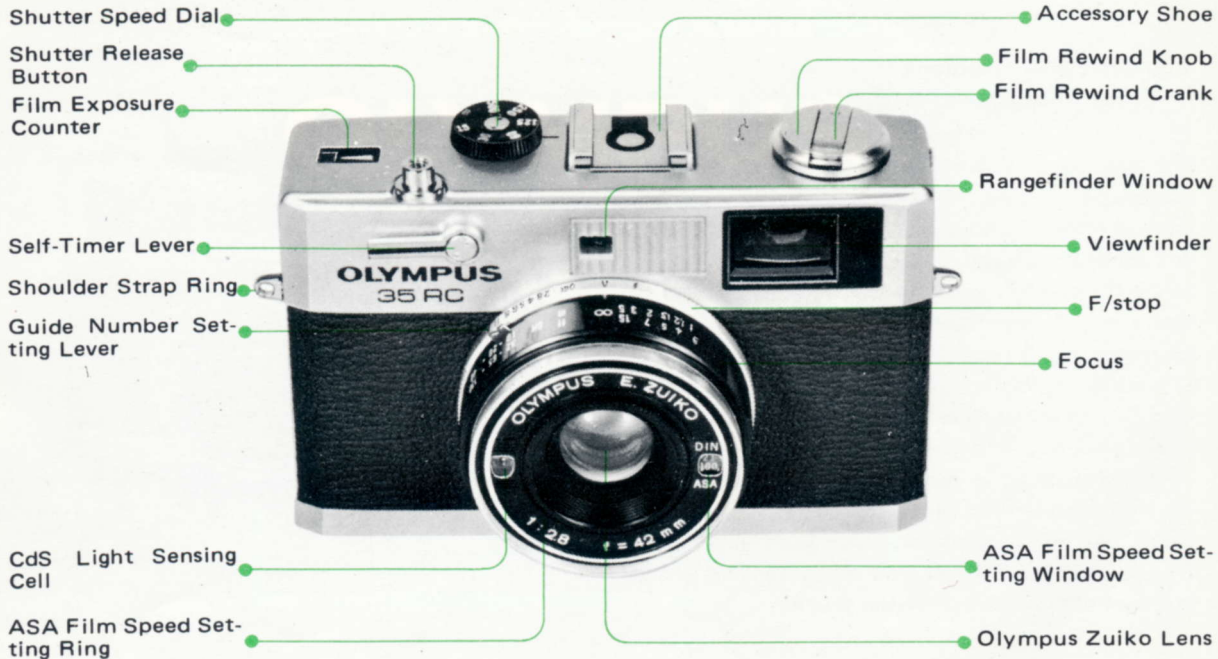

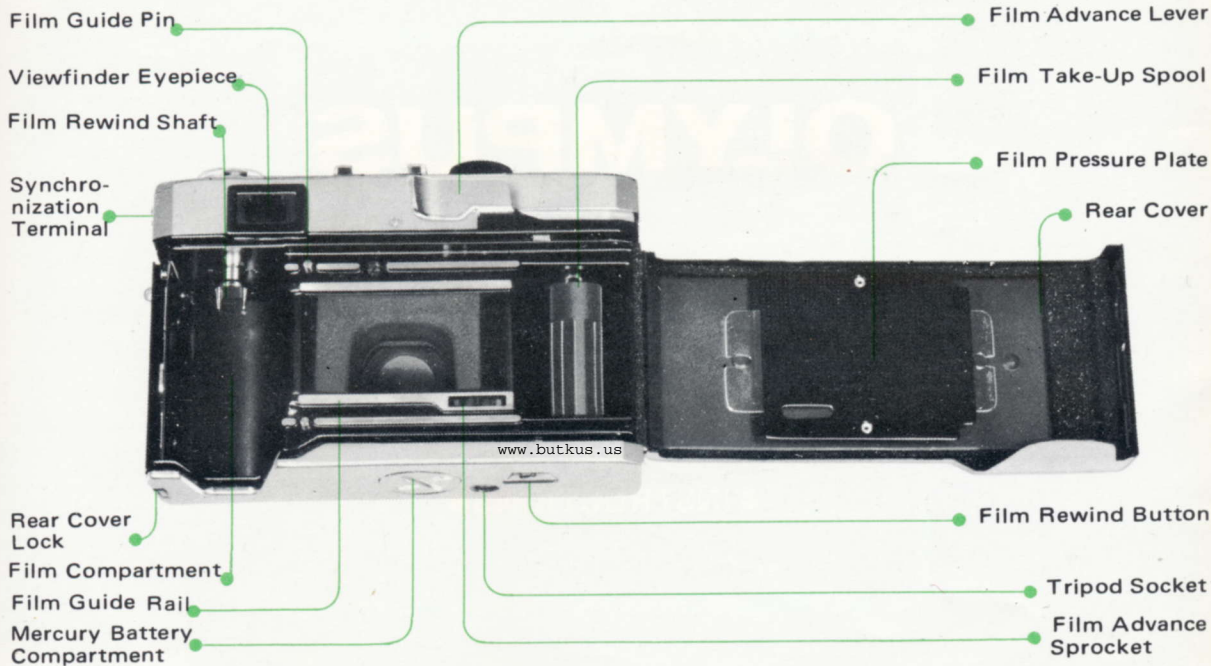





TABLE OF CONTENTS

Name of Parts	3	Looking Through Viewfinder	20
Specifications	5	Some Modifications in Automatic Photography	21
Inserting Battery	6	Composing and Focusing	23
Condensed Operating Instructions	7	Depth of Field	24
Loading Camera	11	Holding Camera Properly	27
Operating Film Advance Lever / Film Exposure Counter	15	Rewinding	28
ASA Setting Ring	16	How to Use Flash	29
Shutter Speed Dial	17	How to Use Self-Timer	31
F/Stop Ring	18	Camera Care	32
How to Select Correct Exposure	19	Accessories	33



This manual is for reference and historical purposes, all rights reserved.

This page is copyright© by M. Butkus, NJ.

This page may not be sold or distributed without the expressed permission of the producer

I have no connection with any camera company

On-line camera manual library

This is the full text and images from the manual. This may take 3 full minutes for the PDF file to download.

If you find this manual useful, how about a donation of \$3 to: M. Butkus, 29 Lake Ave., High Bridge, NJ 08829-1701 and send your e-mail address so I can thank you. Most other places would charge you \$7.50 for a electronic copy or \$18.00 for a hard to read Xerox copy.

This will allow me to continue to buy new manuals and pay their shipping costs.

It'll make you feel better, won't it?

**If you use Pay Pal or wish to use your credit card,
click on the secure site on my main page.**



Donate: www.PayPal.me/butkus

venmo: @mike-butkus-camera Ph. 2083

● SPECIFICATIONS

Format:	35 mm roll film (24 x 36mm full frame) .
Lens:	E. Zuiko 42mm F2.8, 5 elements in 4 groups.
Shutter:	Olympus Shutter.
Shutter Speed:	B, 1/15, 1/30, 1/60, 1/125, 1/250, 1/500.
Flash Synchronization:	X contact .
Guide Number Scale:	10 to 40 in meter (32 to 130 in feet).
Viewfinder:	Rangefinder 0.6x. Shutter speed, F/stop indications, parallax correction marks and red zone for insufficient exposure are all visible in the finder.
Exposure Meter:	Ultra sensitive cadmium sulphide (CdS) type. Angle of acceptance 43°.
Exposure Control:	Auto — Shutter speed preferred (except B) with shutter release lock for insufficient exposure. Manual — Shutter speed and F/stop manually selective.
Film Speed Scale:	ASA 25 — 800 (DIN15 — 30).
EV Range (ASA100):	EV7 (F2.8, 1/15) — 18 (F22, 1/500).
Focusing:	Double image coupled rangefinder. Helicoid rotating. Focus range 0.9m (3 ft.) — infinity ∞ .
Film Loading:	Olympus easy loading system .
Film Advance:	Lever type. Advancing angle 150° in a single stroke or several smaller strokes. Automatic shutter cocking. Double-exposure and double winding prevention.
Film Counter:	Exposure counting type. Automatic self-resetting.
Film Rewinding:	Rapid rewind crank. Film release button on bottom of camera.
Power Source:	1.3V mercury battery PX 625, Mallory RM-625R, Eveready E625, General No. 625 or equivalent. 1 pc.
Self-Timer:	Angle of operation 90° about 10 sec. delay.
Rear Cover Opening:	Hinge type.
Accessory Shoe:	Cordless flash contact.
Filter Mount:	Olympus 43.5mm screw-in type.
Size & Weight:	109 x 70 x 50mm (4 1/4" x 2 3/4" x 1 15/16"). 410 grams (14 1/2 oz.)

● INSERTING BATTERY

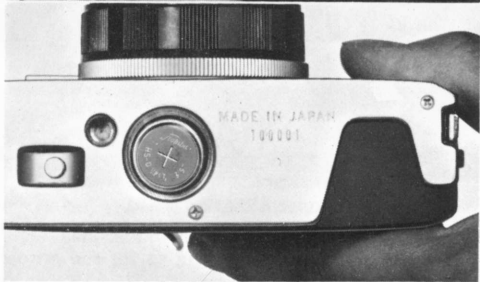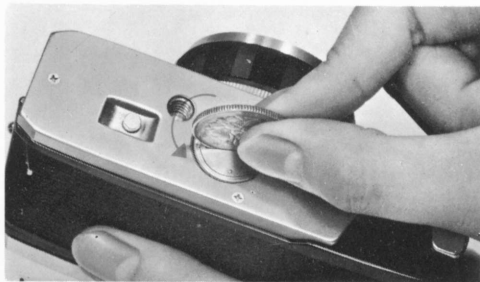

For correct camera operation, the mercury battery must be properly inserted into the battery compartment at the bottom of the camera.

(a) Place a coin in the battery compartment channel, rotate it counterclockwise until completely loose.

(b) Lift the compartment lid off.

(c) Insert a clean-wiped mercury battery (PX 625 1.3V or equivalent) into the compartment observing correct polarity as illustrated left, so that the (+) end of battery faces outward. Please look at the inside of the battery lid engraved with (+) mark for correct matching symbol.

(d) Replace the lid by rotating screw clockwise.


- To test the battery, remove the lens cap, set the red mark "A.." to the central index red line, and turning the camera toward a bright object, depress the shutter release button.

If shutter is released, the battery is properly inserted. If not, check the polarity of the battery or try a fresh battery.


- The battery should be replaced once a year.

- When the camera is not in use, rotate the F/stop ring and set the "OFF" position to the center index.


● CONDENSED OPERATING INSTRUCTIONS

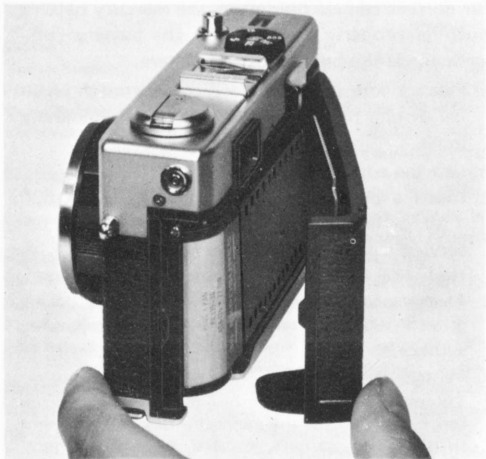


- 1** Load the camera with a film. (See page 11)
The camera is already charged with the mercury battery. (See page 6.)

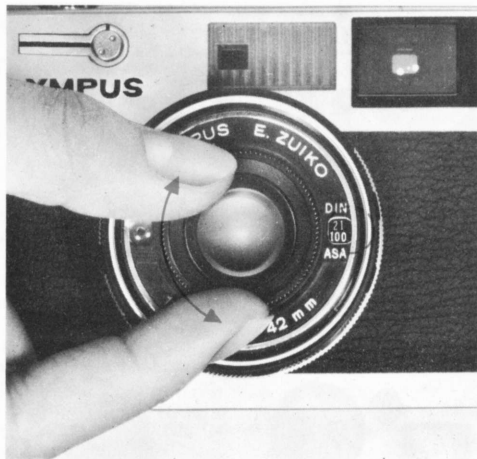


- 2** Set the proper ASA film speed.
(See page 16.)
When using flash, also be sure to set the proper guide number. (See page 27.)

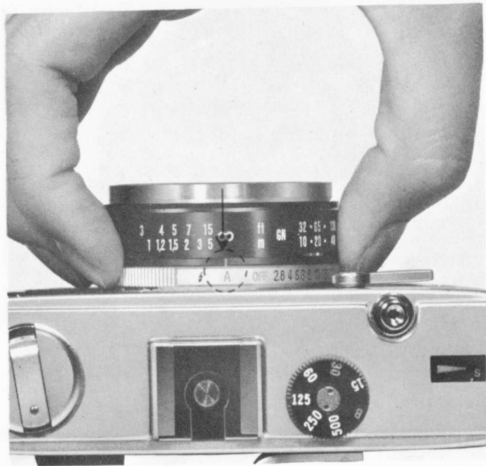


3 Set the mark "A" of F/stop ring to the central index. (See pages 18–19.)

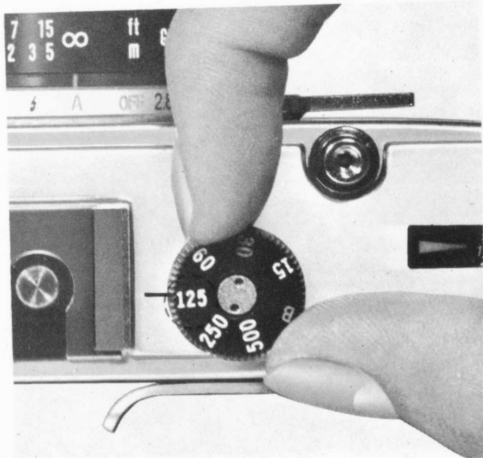

4 Set the shutter speed dial according to the subject to be photographed. (See page 17.)

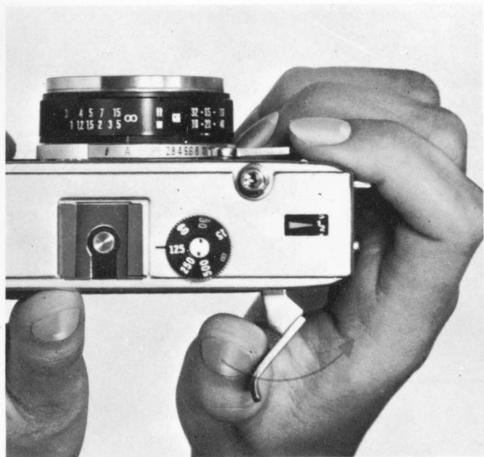


- 5** Advance film and release shutter until No. 1 appears in exposure counter window.
(See page 15.)

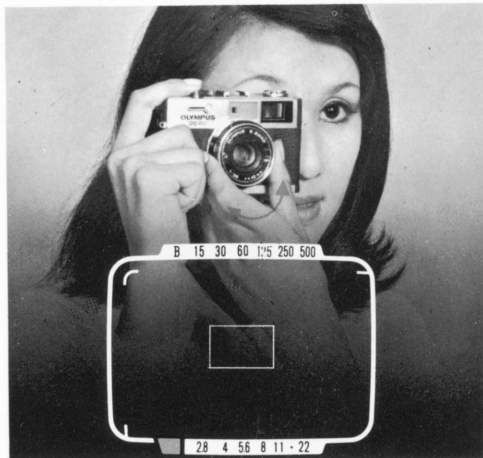

- 6** Compose your picture and focus.
(See page 23.)



7 Release shutter. (See page 25.)

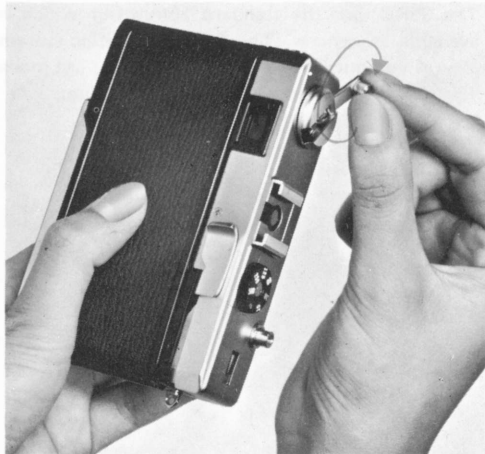


8 After the entire roll of film is completely exposed, depress the rewind button, rewind film into magazine and remove. (See page 28.)

● LOADING CAMERA


The 35RC uses the standard 35mm film which is available anywhere. The EL easy loading system assures you quick-foolproof loading. You can make 12, 20 or 36 exposures on one roll of film. Each picture is 24 x 36mm in full frame.




When you load the camera, avoid the direct sunlight.

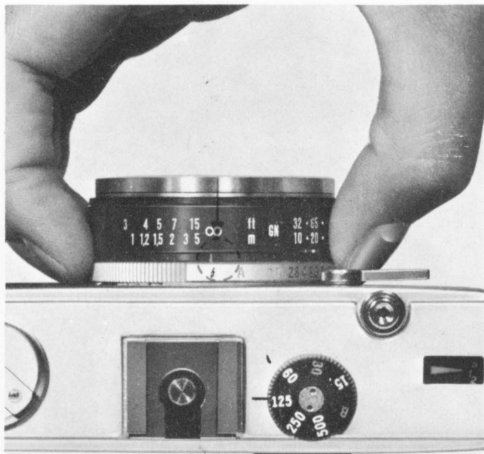


- 1 Turn F/stop ring to bring the mark (∞) to the center index on the lens barrel. If the mark "A" is set to the center, shutter release button might be locked, blocking smooth loading when you load in a dark place.

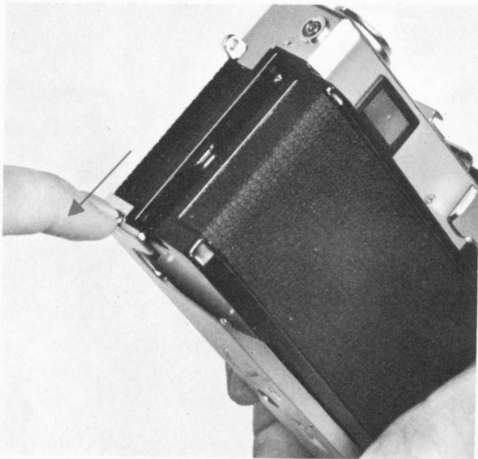


2 Open rear cover by pulling down rear cover lock.

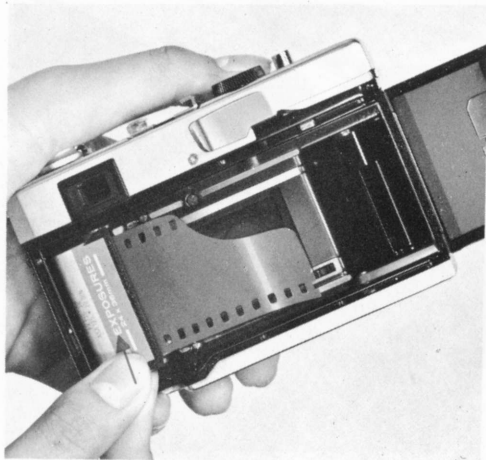


3 Insert film magazine onto rewind shaft.

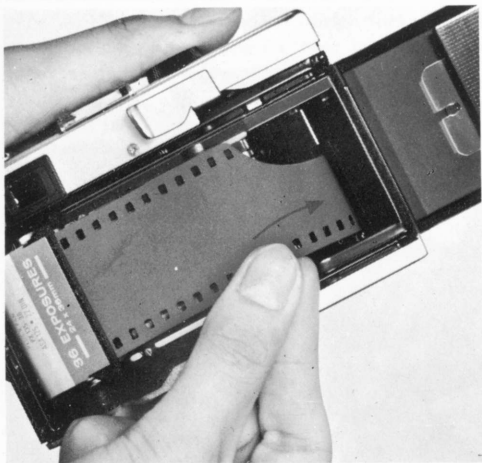

- 4** Insert film leader into one of the slits on easy load take-up spindle.

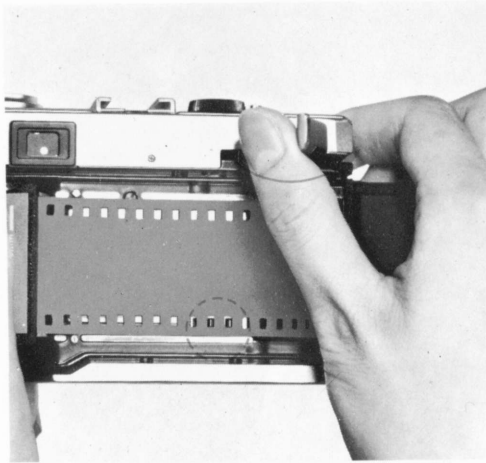


- 5** Advance film until it is securely placed between film guide pins. Make certain sprocket wheel engages in perforation in film properly before closing rear cover.

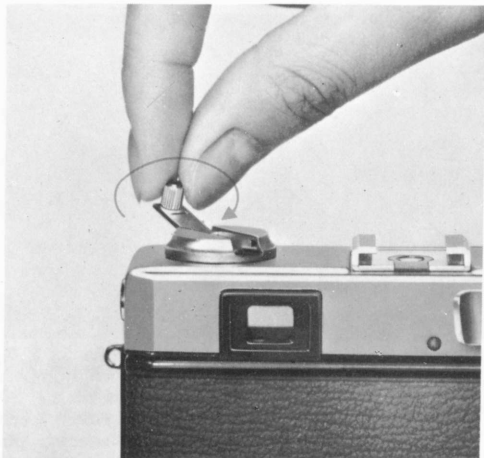


6 Close rear cover lock. (Make sure it clicks into place.)

After closing the rear cover, lift up the rewind crank and turn it gently in the direction of the arrow until slight resistance is felt. This will take up any slack in the cartridge.

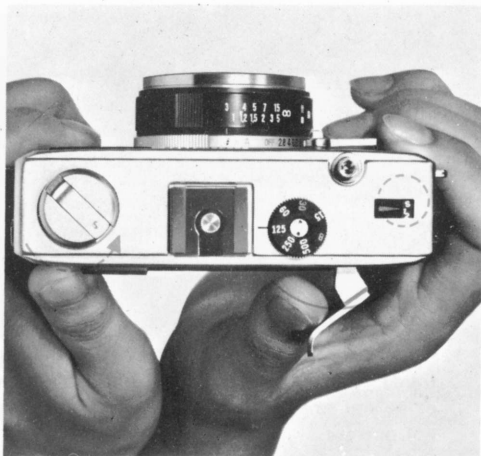


7 Advance film by rotating film advance lever and depressing shutter release button alternately until No. 1 appears in film exposure counter window on top of camera.

● OPERATING FILM ADVANCE LEVER

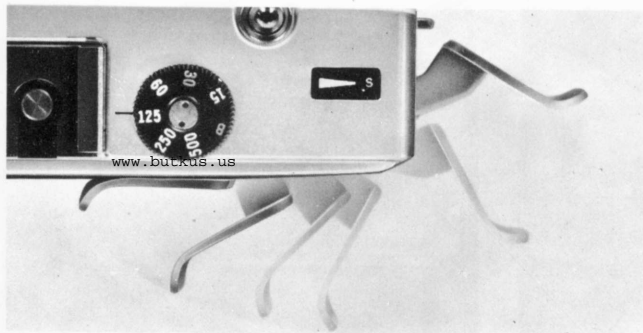


1. Advance the lever until it stops. This will advance the film one frame. Be sure you advance the lever all the way in a full stroke or several smaller strokes until it stops; otherwise shutter will not operate.
 2. Release shutter.
- After shutter is released, film is ready for next advance.

● FILM EXPOSURE COUNTER



The film counter shows S, 1, 2, 4 and subsequent even numbers up to 36. The numbers 12, 20 and 36 are in yellow color. Each time the film is advanced, the counter counts up the number of exposures made, which is marked by the orange color arrow (►). When the rear cover is opened, the counter returns automatically to S.

● ASA SETTING RING

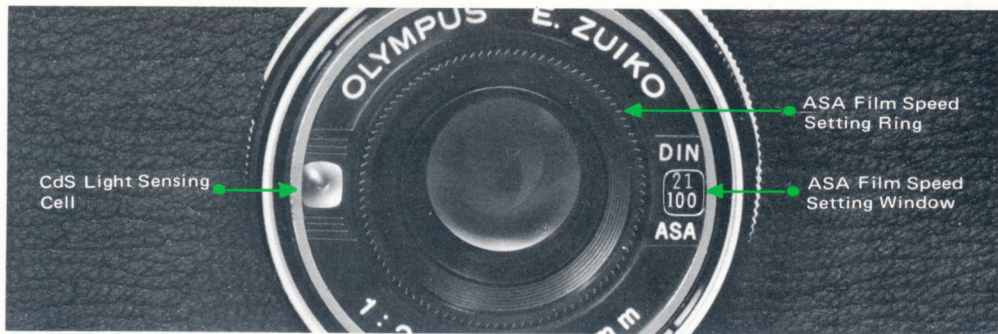


Depress ASA ring in the front of camera slightly and rotate it around the lens to select ASA (or DIN) rating for your film. For perfect exposures, the correct ASA or DIN film speed of your film must appear in the ASA setting window. The window is in the right side of the lens as viewed from the front.

- Make sure the ASA setting ring clicks into a stop. Do not use midway scale reading.
- Refer to the table below for your film speed. When your film is ASA 40 (DIN 17), set the ring to ASA 32 (DIN 16).

FILM SPEED COMPARISON TABLE




ASA	25	32	50	64	80	100	125	160	200	250	400	500	800
DIN	15	16	18	19	20	21	22	23	24	25	27	28	30

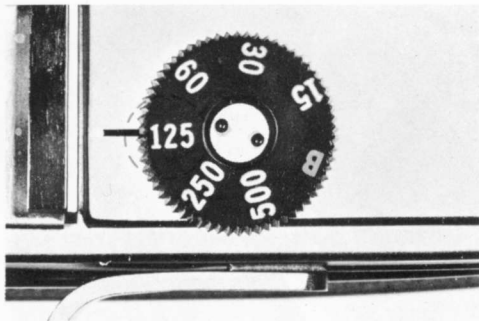● SHUTTER SPEED DIAL



An exposure meter is built into the 35RC. You can get a correct exposure simply by setting the shutter speed dial. The camera determines the right aperture setting as you set the shutter speed. The dial is on top of the camera. It is numbered B, 15, 30, 60, 125, 250 and 500. B means bulb exposure in which the shutter remains open all the time the shutter release button is depressed. It is used for long exposures in manual operation, while 15 means 1/15 sec., 30 equals 1/30 sec... 500, 1/500 sec.

SHUTTER SPEED REFERENCE TABLE FOR BEGINNERS

ASA (DIN) film speeds Subject condition	25 ~ 40	64 ~ 125	200 ~ 400
 Fine weather	1/125	1/250	1/500
 Cloudy weather	1/60	1/125	1/250
 Indoors	1/15	1/30	1/60


Be sure to use only the marked shutter speed numbers, signalled when dial clicks into position at the black index mark.

As to the special use of the red number 30, refer to "How to Use Flash" at pages 29-30

- You can set proper shutter speed either before or after film advance.

In automatic exposure, you cannot release shutter if the dial is set to B.

● F/STOP RING

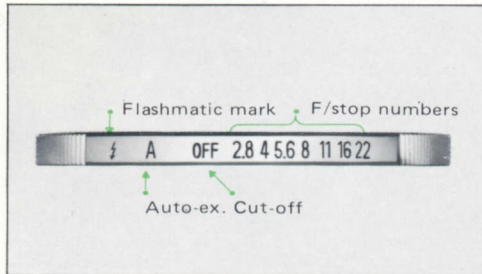

The F/stop ring is on the lens barrel, and bears black numbers 2.8, 4, 5.6 ... 16 and 22 with three symbols ⚡, A and OFF

● F/stop numbers

The larger the F/stop number is, the smaller the lens aperture is. Also the F/stop can use midway scale readings which the shutter speed dial or ASA setting ring cannot.

In manual exposure, bring the most suitable number to the center red index line, basing your choice on shooting conditions.

The size of the lens aperture can be observed in the viewfinder. Slightly depress the shutter release button, and the pointer will appear on the scale to indicate the F/stop number. (See page 19.)

● Position "A"

When you set the F/stop ring to the "A" position, the camera exposes automatically. In this case, the F/stop number is also indicated by the pointer in the viewfinder when the shutter release button is slightly depressed.

● Position "⚡"



When you set the mark ⚡ to the center index, you can take a flash picture. Set the guide number printed on the flash bulb package before shutter is released. (See page 30.)

The lens aperture is automatically decided by focusing on the subject.

● Position "OFF"

When you set the OFF position to the center, battery circuit is cut off and shutter is locked. Keep the camera in this state, when not in use for longer periods, to prevent battery exhaustion.

● HOW TO SELECT CORRECT EXPOSURE

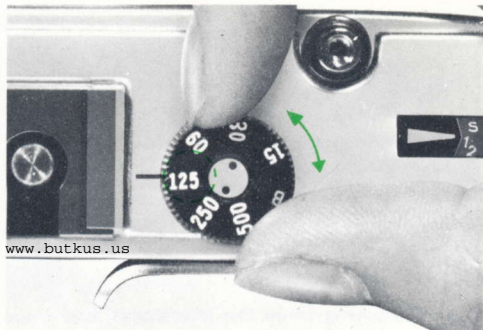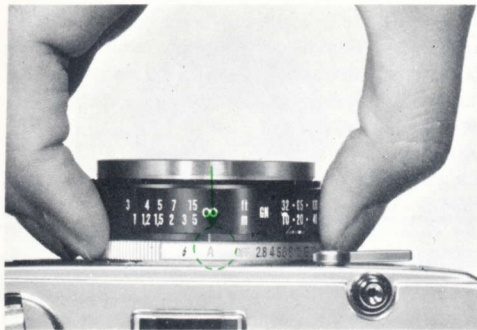

The characteristics of 35RC will be fully appreciated in auto-exposure photography. When you set the F/stop ring to the mark A, a proper lens aperture is automatically combined with your predetermined shutter speed for correct exposure. In automatic exposure the shutter speed must be predetermined, depending on shooting conditions, and this shutter speed will automatically control the F/stop for proper exposure. (See page 17.)


Both the shutter speed and F/stop numbers can be observed in the viewfinder.

If you prefer, however, you can select manual exposure. In manual exposure you can choose whatever combination of shutter speed and lens aperture you like.

Just set off the mark A from the center index and select a preferable combination of shutter speed and F/stop number manually.

19 In manual, 35RC can be used without battery.

● LOOKING THROUGH VIEWFINDER

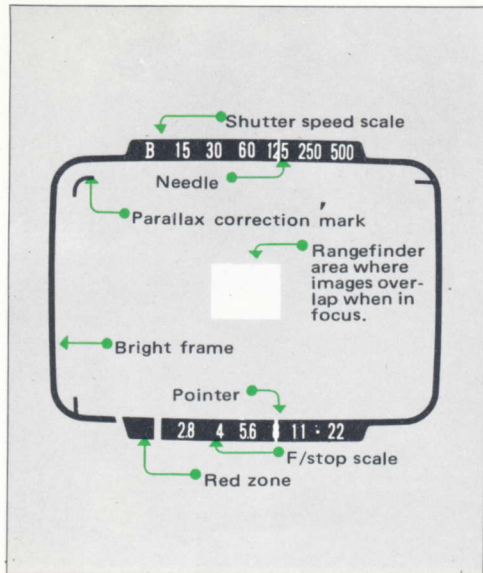

● Shutter speed scale

The needle is linked with the shutter speed dial which click stops at each number. Your dialed number is indicated by the needle on upper scale.

● F/stop indication scale

In all cases, automatic, manual or flash exposure, the pointer on the lower scale indicates the F/stop number as the shutter release button is depressed slightly.

● Red zone

When the pointer enters the red zone, it warns for over- or under-exposure, locking the shutter release button, so the shutter cannot be released. If this is because of over-exposure, or the subject is too bright, increase the shutter speed. If it is because of under-exposure or the subject is too dark, decrease the shutter speed.

● If the shutter button locks due to under-exposure even when dial is set at 1/15 sec., use flash; if it locks due to over-exposure even at 1/500 sec., mount ND filter on lens to cut light intensity.

● SOME MODIFICATIONS IN AUTOMATIC PHOTOGRAPHY

If you wish intentionally to over- or under-expose your picture for special effects or due to background conditions, you can realize your intention even in automatic photography by over- or under-rating the ASA setting on the camera.


Modification by this procedure may be desirable in special circumstances as suggested below. Always be careful to reset the ASA film speed to its original value afterwards.

1. Against the light

When clear details should be particularly emphasized in your photograph, taken against the light or a good deal of sky or sea water, simply set the ASA to half the value of the original shooting from a dark place, setting to over-expose by one F/stop equivalent.

2. Against brightness shooting from a dark place

When taking a picture facing a bright subject, set the ASA scale to double the original ASA setting to under-expose by one F/stop equivalent.

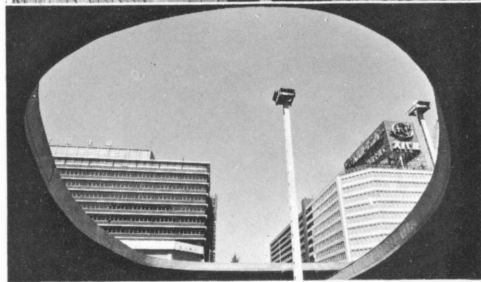



3. Daylight-flash synchronization

When you want to take a bright picture of a subject in shadow under broad daylight conditions, a flash synchronization will help you.

In such a case, determine exposure factors as follows: Use an electronic flash or PS100. Set the appropriate guide number stop on the lens barrel by depressing the guide number lever.

Next set the mark \swarrow to the center index, bring the subject into focus. Slightly depressing the shutter release button, read out the F/stop number indicated by the pointer in the viewfinder. If the F/stop is F5.6 for instance, then reset the F/stop ring to the mark A, rotate the shutter speed dial so that the pointer stops at F5.6 on the scale when the release button is depressed slightly. This is a daylight flash synchronization method with 35RC useful indoors or outdoors.

● COMPOSING AND FOCUSING



1) Composing the picture

Looking through the viewfinder, you will see a luminous frame enclosed in a yellow border. This is called the "bright frame". Any subject matter within this frame will be exposed on the film. Compose your picture so that the subject occupies the frame area as fully as possible. For close-up pictures within 1m (3.3ft.) compose the subject in the area enclosed by 3 small indices (parallax correction marks) in the frame.



2) Focusing

To focus, use the bright rectangular section at the center of the viewfinder.

Looking through the viewfinder, move the helical focus ring on the lens barrel, until the double images within the small rectangle coincide and become clearly visible. Now the subject is in focus. The distance scale on the lens barrel is indicated in meters (white color) and in feet (orange color). A reading in feet or meters aligned with the center index red line represents the distance to the subject.



● DEPTH OF FIELD

If the focus is set at a certain distance, objects at that distance are most clearly photographed.

At the same time, an area ahead and behind this distance is also in focus. This area is called the "depth of field". The larger the F/stop number is, the greater the depth of field.

For example, assume you are shooting a subject 3 meters (10 ft.) away at F/stop 16. From the chart you can see your depth of field will be 1.47 (4.85 ft.) to infinity. In automatic exposure you can read off the F/number from the scale in the viewfinder,

determine distance to the subject and then locate depth of field on the chart.

To some extent you can control depth of field by your choice of shutter speed. The slower the shutter speed, the larger the F/stop number and, thus, the greater the depth of field.



●E Zuiko F2.8 f=42mm (meter)

F/stop \ Distance	Distance								
	0.9	* 1	* 1.2	* 1.5	* 2	* 3	* 5	10	* ∞
2.8	0.86~	0.95~	1.12~	1.38~	1.78~	2.52~	3.78~	6.05~	15.10~
	0.95	1.06	1.29	1.65	2.28	3.71	7.39	29.04	∞
4	0.84~	0.93~	1.09~	1.33~	1.71~	2.37~	3.45~	5.23~	10.79~
	0.97	1.09	1.33	1.72	2.42	4.09	9.14	122.03	∞
5.6	0.82~	0.90~	1.05~	1.27~	1.61~	2.19~	3.07~	4.40~	7.71~
	1.00	1.13	1.39	1.83	2.65	4.79	13.71	∞	∞
8	0.79~	0.86~	1.00~	1.20~	1.49~	1.96~	2.64~	3.55~	5.39~
	1.05	1.19	1.50	2.02	3.07	6.47	55.35	∞	∞
11	0.75~	0.82~	0.95~	1.12~	1.36~	1.74~	2.25~	2.87~	3.93~
	1.12	1.29	1.66	2.32	3.86	11.51	∞	∞	∞
16	0.70~	0.76~	0.86~	1.00~	1.19~	1.47~	1.80~	2.18~	2.69~
	1.27	1.49	2.01	3.10	6.76	∞	∞	∞	∞
22	0.65~	0.70~	0.78~	0.89~	1.04~	1.24~	1.46~	1.69~	1.96~
	1.50	1.83	2.71	5.24	77.86	∞	∞	∞	∞

●E Zuiko F2.8 f=42mm (feet)

F/stop \ Distance	Distance								
	* 3	3.3	* 4	* 5	* 7	10	* 15	30	* ∞
2.8	2.85~	3.12~	3.73~	4.58~	6.18~	8.38~	11.60~	18.81~	49.54~
	3.16	3.50	4.31	5.51	8.07	12.40	21.28	74.77	∞
4	2.80~	3.05~	3.64~	4.43~	5.91~	7.88~	10.64~	16.38~	34.40~
	3.24	3.59	4.45	5.74	8.60	13.72	25.56	185.65	∞
5.6	2.72~	2.97~	3.51~	4.24~	5.56~	7.27~	9.54~	13.87~	25.30~
	3.34	3.72	4.66	6.11	9.48	16.14	35.66	∞	∞
8	2.62~	2.84~	3.33~	3.98~	5.12~	6.51~	8.26~	11.29~	17.58~
	3.51	3.94	5.02	6.76	11.19	21.98	88.08	∞	∞
11	2.51~	2.70~	3.14~	3.70~	4.65~	5.76~	7.08~	9.17~	12.89~
	3.76	4.26	5.56	7.80	14.47	40.28	∞	∞	∞
16	2.33~	2.50~	2.86~	3.32~	4.05~	4.85~	5.73~	7.00~	8.83~
	4.26	4.92	6.78	10.52	28.52	∞	∞	∞	∞
22	2.16~	2.30~	2.59~	2.95~	3.50~	4.08~	4.67~	5.47~	6.43~
	5.07	6.07	9.24	18.26	∞	∞	∞	∞	∞

● HOLDING CAMERA PROPERLY



The camera must be held steady in order to take good pictures. Slight movements may cause blurred pictures.

Practise until you become full accustomed to the "feel" of the camera. Slowly depress the release button with the ball, not the tip, of your finger. Be careful not to cover any part of the lens or the CdS sensing cell with your fingers or the case.

And don't forget to remove the lens cap? You can hold the camera either vertically or horizontally as your composition requires.

When holding the camera vertically, keep both elbows close to your body, and support the camera firmly with the left arm, pressing the camera against your forehead.




● REWINDING

When you have finished the entire roll of film, carefully observe the film counter for the correct exposure count. You may also feel some resistance in the film advance lever after you have finished the entire roll of film. Never force the film beyond the last frame. If you are uncertain whether you can get one extra picture or not, do not take any chance and rewind the film immediately in order to prevent accidental exposure of the entire roll. To rewind film after you have taken your last picture, simply turn the camera over and depress the rewind button. Then raise the rewind crank and rewind the film completely into its cassette. You can easily determine that the film has been completely rewound by the sudden change of tension. Next open the rear cover and remove the cassette. Avoid doing this in sun or bright light.

The rewind button will automatically return to its original position when the next roll of film is placed in the camera.

Do not open the rear cover until the exposed film has been rewound.

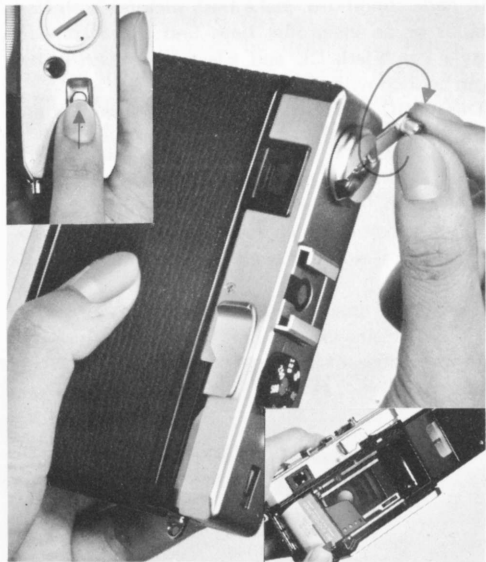

● HOW TO USE FLASH

In dark conditions, make flash pictures with flash bulbs or an electronic flash unit. The compact style Pen Flash CL and Electronic Flash PS100 can be used without a cord.

This 35RC flashmatic system will eliminate any trouble of exposure calculation.




1 Attach flash unit on camera.

a) Simply insert the Pen Flash CL or PS 100 into accessory shoe at the top of camera, where it connects automatically to the shutter release mechanism.



b) When using ordinary flash guns or electronic flash, insert the unit into accessory shoe and attach flash connecting plug into synchro. terminal of camera.



www.butkus.us

2 Setting the shutter speed


- When using flash bulb, set the speed at 1/30 sec. to obtain correct synchronization.
- When using electronic flash, any shutter speed setting up to 1/500 sec. is available.

3 Setting the guide number

Using the flashmatic system, after you set the guide number, the correct exposure is automatically calculated as you focus. No more fumbling through lengthy calculations to find the proper F/stop.

- Set the mark ζ on the F/stop ring to the center index.

		(45)	(90)	
ft	GN	32	65	130
m		10	20	40
		(14)	(28)	

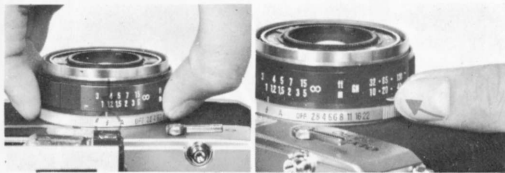

- Referring to the calculator chart on the flash, set the guide number. You can also obtain the proper guide number by multiplying F/stop number times distance. For example, if ASA 80 film is being used, set the film speed on the calculator to ASA 80 and check the proper F/stop number at a distance of 3m (10 ft.). If the calculator dial on the flash shows f4.5, set the guide number to 13.5 (4.5x3m) or 45 in case of feet. If the exact guide number is not indicated on the camera, use the closest number to it.


COMMENT: You can select F/stop manually without using the flashmatic mechanism, if you wish. In this case, please refer to the instructions on your flash unit.




● HOW TO USE SELF-TIMER

The 35RC has a built-in self-timer which enables you to take a picture of yourself without help from others. Create a lot of happy photographic mementos by making effective use of the self-timer.

1. Set the self-timer by turning the lever 90 degrees down until two red dots are aligned.
2. Make certain the film has been advanced securely.

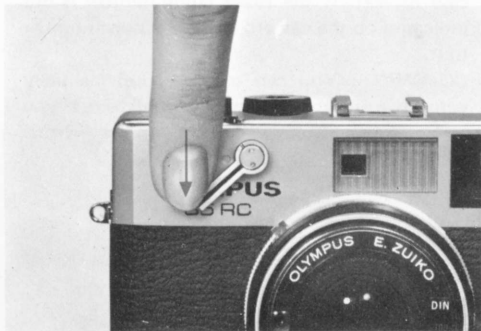


3. Press the shutter release button; then the shutter is actuated in about 10 seconds.
- You may set the self-timer lever either before or after advancing the film.
 - You can use the self-timer at all the shutter speeds except B.
 - When the film has not been advanced securely, or insufficient exposure is warned by the pointer entering into the red zone, the shutter cannot be actuated even if you operate the self-timer.

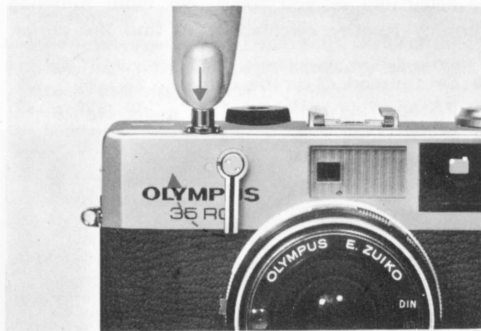

● CAMERA CARE

1. Dust and moisture are primary harmful agents affecting your camera. Be sure to store the camera in a dry, well-ventilated place making sure the shutter and self-timer are free from tension.
2. Never drop the camera or give it any shock to jar its precision alignment. The camera should not be left in a place 50°C (122°F) or higher. At temperatures reaching -15°C (5°F) or lower, warm the camera.
3. Do not leave the camera near the radio set, TV or other strong magnets for any length of time.
4. Do not touch the lens with your finger. If touched, wipe it with a clean unstarched cotton cloth. Fingerprints, if not wiped off immediately, will eventually be unremovable.
5. After using the camera on the beach, be sure to wipe the surface of the camera with a soft cloth so that no salt or other corrosive substance will be left on it.
6. When you do not use the camera, set the F/stop ring to the OFF position. If the camera will not be used for a long time, remove the mercury battery from the compartment. Next time you use the camera, put the battery in the compartment correctly, after wiping it with a dry clean cloth.
7. If the camera should need service, bring it immediately to your dealer, who is an OLYMPUS service agent.

● HANDY ACCESSORIES




● Filters

Use Olympus 43.5mm screw-in type. When Y2 or ND4 filter is attached, the ASA setting should be adjusted to 1/2 or 1/4 respectively against original ASA number. For instance, set ASA at 50 or 25 instead of 100.

Filter Types and Characteristics:

UV	Eliminates undesirable ultra-violet rays and gives clear pictures. Also usable constantly for lens protection. (For black-and-white film)
Y2	Accentuates contrasts, for example, by darkening a blue sky and bringing white clouds into relief, and produces three-dimensional effects. (For black-and-white film)
1A	(skylight) -Like UV, eliminates stray ultra-violet rays and prevents pictures from assuming a bluish tone. Usable for lens protection. (For color film)
81C	(for cloudy weather) -Designed for color photography, prevents a bluish tone from entering pictures taken in cloudy or rainy weather.
82C	(for morning and evening) -Designed for color photography, prevents a yellow-reddish tone from entering pictures taken during morning or evening hours when red rays abound.



● Lens Hood

This lens hood eliminates undesirable glare caused by the sun or other light source. The hood can be put on the lens in reverse, when the camera is in its case.



● **OLYMPUS PS200**

The Olympus PS200 Electronic Flash operates on penlight batteries. The Olympus PS200 can be used with such cameras as Olympus 35RC, Olympus Trip 35, Pen EE-2, EES-2, and any other cameras with hot shoe contact. Its power source is two 1.5V penlight batteries, carbon/zinc or alkaline. The number of flashes is 200 from set of fresh alkaline batteries. Guide number 14 in meter or 45 in feet (ASA 100) color temperature 5,800° kelvin. It measures 31mm x 55mm x 64mm (1 1/4" x 2 1/8" x 1 1/2") and weighs 75 grams (2 3/8 oz.)

● HANDY ACCESSORIES




● Attachment Lens (Close-up lens)

$f=30\text{cm}$, 43.5mm screw-in type

By attaching the lens, you can take a close-up picture at minimum distance of 29.6 cm (11 $\frac{3}{4}$ "'). The area photographed at the time is 17.3x 26cm (6 $\frac{1}{4}$ x10 $\frac{1}{4}$ "').

When using this lens set the distance scale at infinity (∞).

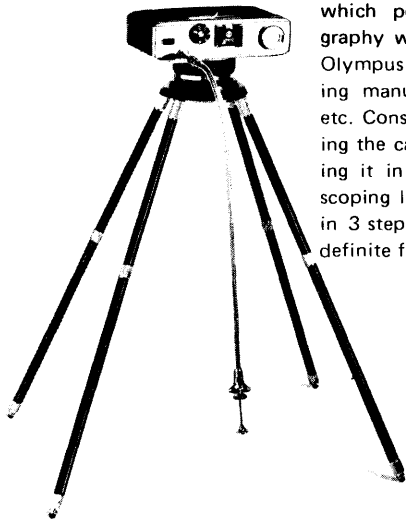

● Handy Copy Stand

A convenient, portable copy stand which permits close-up photography with the 35RC and other Olympus cameras. Ideal for copying manuscripts, photos, books, etc. Consists of a stage for mounting the camera, a clamp for securing it in position, and four telescoping legs which are calibrated in 3 steps. Each step represents a definite field size.

OLYMPUS

OLYMPUS OPTICAL CO., LTD. TOKYO, JAPAN
43-2 Hatagaya 2-chome, Shibuya-ku, Tokyo, Japan

HOW TO USE GUIDE NUMBER TABLE

1. Find ASA number on film carton or instruction sheet in the carton.
2. Locate this number in the film speed (ASA number) column of the table.
3. Look on your flash bulb package or in the instruction manual of your electronic flash and determine the brightness of your flash. This is described as a Beam Candle Power Seconds (BCPS) number or Kodachrome II (ASA 25) guide number.
4. Locate the number in the headings across the top of the table.
5. Find your guide number where the film speed line (no. 2 above) and the light output column (no. 4 above) cross on the chart.
6. Set your camera on this guide number or the closest number on your camera if the exact number does not appear.

IMPORTANT: RESET THE GUIDE NUMBER IF YOU CHANGE YOUR FILM OR FLASH.

GUIDE NUMBER TABLE

BCPS Output and Kodachrome II Guide Number of Flash

Film Speed (ASA Number)	BCPS	700	1000	1400	2000	2800	4000	8000
	Guide No.	30	35	40	50	60	70	100
25		30	35	40	50	60	70	100
50		40	50	60	70	85	100	140
64		45	55	65	80	95	110	160
80		55	65	75	90	110	130	180
100		60	70	85	100	120	140	
125		65	80	95	110	130	160	
160		75	90	110	130	150	180	
200		85	100	120	140	170		
400		120	140	170				
800		170						