



A black and white photograph showing the back of an Olympus digital camera. The lens cap is removed, revealing a large, circular lens element. The word "OLYMPUS" is printed in white, bold, sans-serif capital letters across the center of the lens. To the left of the lens, there is a vertical strip of controls, including a small LCD screen displaying icons for a mountain, two people, and a battery level indicator. Above the lens, there is a small circular flash unit and a speaker grille. The camera body is black and has a textured finish.

OLYMPUS

Always in Style.

The tiny XA2 Capsule Camera™ is so beautifully styled, smooth and slim, you'd hardly know it was a camera until you snap open the unique Dust Barrier.™ And it's so sophisticated, mistakes are almost impossible. Anyone can use the XA2, anywhere, for sparkling full-frame 35mm pictures even professionals envy. In impeccable style.





**Wherever you are, whoever
you are, you'll get more out of
life with an XA2.**



Business: The ideal way to
remember faces and occasions.



Society: The elegant trend-
setter — never out of place.



THE X A WAY



Sports: Never in the way — always ready for the big moment.



Family: Great memories — with crystal clarity.



Friends: Exploring life becomes exciting — and rewarding.

At Night Too.



Yellow lamp in finder indicates dim light. Attach A11 or A16 Flash.  Sign shows flash unit is ON.



The sharp A-11 or A-16 flash units work integrally with the XA2 for automatically perfect exposures. Just screw in the flash unit, and set the flash lever on the camera.

The new A-16 features a high 16 guide number (ASA 100, meters, or GN53, ASA 100, feet) and extra fast 5 second recycling time. It uses two 1.5V AA 'penlight' batteries.



Take it out.



Open it up.



Shoot.





Total Simplicity.

"Capless/caseless" convenience makes the XA2 a joy to use. Just open the Dust Barrier™ — and you're ready to shoot! The special Focus-Free™ system keeps snapshots sharp automatically. For close-ups or distant scenes, perfect focus comes at the touch of a lever. The electronic programmed shutter guarantees ideal exposures all the way from 1/750 to 2 full seconds. And other super-refined features include the unbelievably soft, positive "feather-touch" shutter release, audio-visual self-timer and battery check, and far more.

THE X^AWAY



THE XAWAY



**Ingenious in
every detail.**

OLYMPUS

15

ASA
100

13

12



- | | | | |
|--|--|--|---|
| 1 Self-Timer/Battery Check Lamp | 4 ASA Film Speed Lever | 7 Feather-Touch Shutter Release | 12 Film Speed Selector for Flash |
| 2 Auto-Return Focus-Free™ Lever | 5 CdS Light Sensor | 8 Exposure Counter | 13 ASA Film Speed Window |
| 3 Flash Lever | 6 Self-Timer/Battery Check Beeper | 9 Film Winder | 14 Charge Lamp |
| | | 10 Battery Chamber | 15 Dust Barrier™ |
| | | 11 Rewind Release Button | |

Focus-Free Lever

Slide up or down for distant shots or close-ups. Lever returns to the Universal Focus™ setting when the Dust Barrier™ is closed.



Dust Barrier™

Switches camera on automatically when opened; gives full protection when closed.



Audio-Visual Device


Flashes and beeps for self-timer countdown, continuous signals for battery check.

Flash Lever

Automatically sets XA2 for flash and switches on flash unit.

36

ASA 400 • 27 DIN

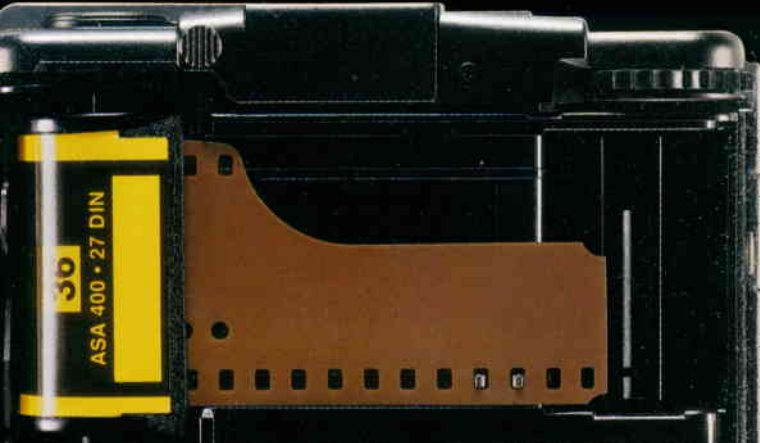

Main Specifications

Film size	24 × 36mm, full frame format on 35mm film.
Lens	Zuiko 35mm F3.5 (4 elements, 4 groups).
Exposure	Programmed shutter auto exposure, 2 sec. – 1/750 sec.
Flash	Auto Electronic Flash A 11 (A16) integrates fully with camera.
Viewfinder	Luminous bright frame with long exposure warning, and flash indicator when flash unit is on.
Focusing	3-zone focus with auto return.
Lens and finder cover	Unique sliding Dust Barrier protects lens, finder and eyepiece; activates auto power switch and shutter lock.
Self-timer	Electronic type audio-visual indication with 12 sec. delay and tone change for the last 2 sec.
Power source	Two 1.5V silver oxide or alkaline-manganese batteries.
Dimensions	102 × 65 × 40mm (4.0 × 2.6 × 1.6 in.)
Weight	200g (7.1 oz.)

Electronic Flash A-11

Main Specifications

Electronic Flash A-16

Automatic electronic flash unit exclusively for use with Olympus XA and XA2	Type	Automatic electronic flash unit exclusively for use with Olympus XA and XA2
10 (ASA 100 meters) or 33 (ASA 100, feet)	Guide number	16 (ASA 100, meters) or 53 (ASA 100, feet)
ASA 100 and 400	Applicable ASA film speeds	ASA 100 and 400
Approx. 7 sec. with AA alkaline battery	Recycling time	Approx. 5 sec. with AA alkaline batteries
2.5m (8.2 ft.) at ASA 100, 5m (16.4 ft.) at ASA 400	Max. working distance	4m (13.2 ft.) at ASA 100, 8m (26.4 ft.) at ASA 400
One 1.5V AA 'penlight' battery (including Ni-Cd battery)	Power source	Two 1.5V AA 'penlight' batteries (including Ni-Cd battery)
60 (H) × 36 (W)* × 33 (D) mm (2.4" × 1.4" × 1.3")	Dimensions	60 (H) × 51.5 (W)* × 38 (D) mm (2.4" × 2.0" × 1.5")
*Measured from interface		*Measured from interface
65 grams or 2.3 oz. (less battery)	Weight	80 grams or 3.1 oz. (less batteries)

Specifications subject to change without notice.