


ONTOFLEX

FOR FILMS AND PLATES

NEW ITEM

1935 SCALE MODEL

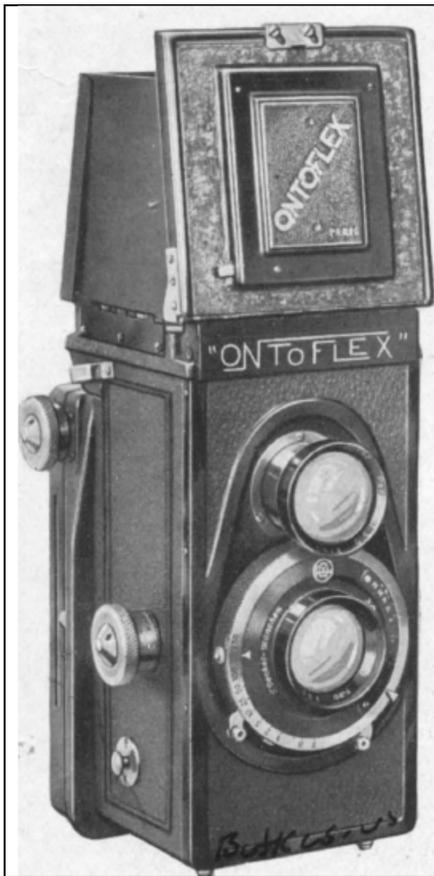

- The only reflex camera, using roll film or plates, that allows operation in both directions, vertically and horizontally, by means of a rotating back. Its reduced size is almost that of a square-format camera, yet it allows for the production of photographs in the practical 6 x 9 cm format.

The ONTOFLEX is the device intended for the hands of an "elite" who will certainly appreciate all the advantages achieved in the manufacture of a device of this kind. Thanks to its rational design, it is perfectly suited to taking photographs of all kinds, including those intended for photojournalism.

To this end, two different aiming methods have been provided: the normal Reflex aiming method (see figure opposite) and the eye-level aiming method, allowing operation in all situations.

DESCRIPTION. - Metal body, covered in black leather, finely varnished and nickel-plated. The REFLEX's viewing chamber opens automatically and is equipped, at its upper part, with a magnifying lens allowing for precise focusing. It also includes an iconometric viewfinder for eye-level aiming.

The most striking feature of this device is its reversible back, designed for using roll film and which, in order to allow shooting in both directions, is reversible, that is to say, it rotates.

The camera is fitted with a Compur delayed-action shutter, providing speeds from one second to 1/400th of a second, and a two-stage exposure setting.

The synchronization of the focusing is ensured by the fact that the two lenses are mounted on a metal plate. The focusing movement is achieved by a multi-threaded helical ramp, driven by a precision gear controlled by a knurled knob on which the different focus settings are indicated, ranging from 1 meter to infinity for a 90 mm focal length lens, and from 1.5 meters to infinity with 105 mm focal length lenses.



Film loading is as simple as in any other film camera. Tension and flatness are ensured by a special film pressure plate. The back is equipped with a viewing window cover for use with panchromatic film.

The camera comes with a neck strap and is equipped, on the back, with a depth-of-field scale (for a 90 mm focal length). The film holder is removable and can be replaced, for the use of photographic plates, with a special adapter.

"ONTOFLEX": & ACCESSORIES

Model A.

Allowing the use of film only.

With ORTHO-KYNOR Roussel 1:3.5 lens

90% focal length, Compur shutter with delayed action at 1/250 sec. . . . 995 fr

With fast Compur shutter with delayed action at 1/400 sec. and FLOR-BERTHIOT lens, 1:3.5, 90% focal length. 1,325 fr >>

This manual is for reference and historical purposes, all rights reserved.
~~These creations are copyright © by M. Butkus, NJ, U.S.A.~~
These creations may not be sold or distributed without the expressed permission of the producer
I have no connection with any camera company

On-line camera manual library

If you find this manual useful, how about a donation of \$2 to:
M. Butkus, 29 Lake Ave., High Bridge, NJ 08829-1701
and send your e-mail address so I can thank you.
Most other places would charge you \$7.50 for a electronic copy or
\$18.00 for a hard to read Xerox copy.

**This will allow me to continue this site, buy new manuals and pay their shipping costs.
It'll make you feel better, won't it?
If you use Pay Pal, go to my web site
www.orphancameras.com and choose the secure PayPal donation icon.**

TESSAR-ZEISS Jena 1:3.5, 90% focal length. .	1,525 fr >>
Model B.	
With removable film back, allowing the adaptation of a plate back.	1f
Compur Rapid shutter with delayed action 1/400 sec.	
FLOR-BERTHIOT lens 1:3.5, 90% focal length.	1,400 >>
TESSAR-ZEISS Jena 1:3.5, 90% focal length.	1,600 >>
- 1:3.8, 105 mm focal length.	1,700 >>
Leather case lined with velvet, for "Ontoflex".	85
Orthochromatic screen "Ontoflex" (in leather case).	50
Screen for Filmcolor.	75
Close-up lens (in leather case).	45
Adapter for single plate holder.	125
Single plate holder 6.5x9 white metal.	14
Black metal plate.	6
Case for plate holder or adapter.	15

Dimensions of the ONTOFLEX:

Length: 16 cm. - Width: 8.5 cm. - Height: 11 cm. - Focal point 90 cm.

16 cm x 8.5 cm - 12.5 cm x 105 mm

Weight of the ONTOFLEX: approximately 1.250 g.